

**Traffic Logix Corporation** 

3 Harriett Lane Spring Valley, NY 10977 USA Tel: (866) 915-6449

**Tel:** (866) 915-6449 **Fax:** (844) 405-6449 <u>www.trafficlogix.com</u> Page | 1 Quote Number QUO-13935-R5N7Z5

Created Date 2/22/2021 Expiration Date 3/31/2021 Prepared by Mark Gregory

### **QUOTATION**

Contact: Gregg Furtney, B.Sc., C.Tech, PMP

Phone: 5198812223

Email: gfurtney@brockton.ca

**Municipality of Brockton (ONT)** 

100 Scott St,

Walkerton, Ontario NOG 2V0

#### **Shipping Address:**

100 Scott St, Walkerton Ontario NOG 2V0 canada

#### Standard Features (Included) – Evolution Signs

- The Evolution radar feedback signs come with 1 year of unlimited cloud access. At the end of this 12 month period the customer has the option to either renew the cloud at a cost of \$400 per sign or resort back to a Bluetooth option at no cost.
- Sign powers down when no traffic present
- Programmable Speed Violator Flashing Strobe Light
- Ambient Light Sensor and Automatic Brightness adjustment
- Banding Mount Bracket
- Safe Pace Management Software
- Bluetooth

#### **Special Notes**

# Add PALLET JACK

# Quote Line Items - All Prices shown are in \$CAD

Product	Product Code	Quantity	Sales Price	Discount	Total Price
Evolution 15	EV15FMEYL-	2.00000	\$3,699.00	\$200.00	\$7,198.00
Solar - Full	SOLLA				
Matrix -					
Includes UMB					

## Totals

Subtotal \$7,198.00 Freight \$392.00 Sales Tax (if applicable) \$986.70 Grand Total \$8,576.70

Terms: 1% - 10 Days - Net 30 We also accept: MC - VISA - AMEX

IF TAX EXEMPT: Please Provide Tax Exempt Certificate with Order



Traffic Logix Corporation 3 Harriett Lane Spring Valley, NY 10977 USA Tel: (866) 915-6449 Fax: (844) 405-6449 www.trafficlogix.com

Page | 2

Quote Number QUO-13935-R5N7Z5

Created Date 2/22/2021

Expiration Date 3/31/2021

Prepared by Mark Gregory

#### **Delivery Requirements**

Please Indicate the availability of the following as this determines the freight costs:

- 1. Do You have a Loading Dock? Yes/No
- 2. Do you have a Fork Lift and Pallet Jack to unload? Yes/No
- 3. Can access be gained by a 53 foot truck for delivery? Yes/No
- 4. Is the delivery address a Construction site? Yes/No
- 5. Is the delivery address a Military site? Yes/No
- 6. If shipping to Military site, is a U.S. Driver required? Yes/No

### **Quote Acceptance Information**

Signature	 
Name	
Title	
Date	

#### Thank you for choosing Traffic Logix. Please sign and return to:

mgregory@trafficlogix.com Mark Gregory Senior Account Manager 866-915-6449

Please complete to set up new account: <a href="https://trafficlogix.com/business-application-form/">https://trafficlogix.com/business-application-form/</a>

# SafePace® TRAFFICLOGIX Evolution 15FM

The Traffic Logix SafePace® Evolution 15FM variable message sign is a versatile display sign that allows you to customize messaging to each driver's behavior.

The versatile Evolution 15FM variable messaging sign offers the ability to display custom text, graphics, or speed display all on the compact, lightweight sign face. The flexible sign offers the ability to to display either driver speed in full 15" digits with speed activated digit color changes or your choice of driver responsive text or graphics on the full matrix speed display sign.









FV 15FM Specification

	LV 13FIVI Specifications	
	Digit Size	15"
	Height	33.1"
	Weight	28 lbs
	24/7, 365 Scheduling	✓
	Data Collection	<b>✓</b>
	Solar Compatibility	✓
	Battery Operated	✓
	Custom Messaging	<b>✓</b>
	Cloud Compatibility	✓
	Trailer Compatibility	✓
	Dolly Compatibility	✓
	Hitch Compatibility	✓
	Warranty	2 Years

#### **Features**

Compact design offers all the features and visibility you'd expect from a full size variable message sign.

Allows for animated text or graphics such as moving arrows or a scrolling message.


Includes integrated flashing speed violator strobe to alert speeding drivers.

**Dual Color Display:** LED digit color can be programmed to change based on driver speed

**Ultra low power consumption** including the most powerefficient radar technology available and optional solar power.

Stealth Mode allows the sign to collect baseline traffic data while speed display appears blank to motorists.

Universal Mounting: Optional mounting brackets let you use one sign at multiple locations with the turn of a key.

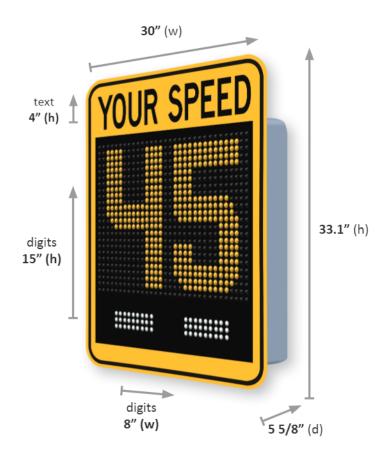

Feature	Specifications		
Dimensions			
Digits	First digit: 15"(h) x 1.5"(w) Other digits: 15"(h) x 8"(w)		
Unit with "YOUR SPEED" sign mounted	Full size sign: 33.1"(h) x 30"(w) x 5.625"(d)		
Sign Weight (includes "YOUR SPEED" sign (2 lbs) mounted)			
AC Powered	28 lbs		
Battery Powered Model	28 lbs (not including batteries)		
Solar powered model	28 lbs (does not include batteries, solar panel or bracket)		
General Specifications			
Operating Temperatures F (C):	-40° (-40°) to 185° (85°)		
Full Matrix Sign with 3-Digit Speed Display	Miles per hour (mph) 3-99. Kilometers per hour (km/h) 5-160.		
Faceplate	High-Intensity prismatic reflective sheeting on "YOUR SPEED" signs with black colored text.  MUTCD approved colors and format		
Communications	Bluetooth, GSM/GPRS		
Programming	SafePace® Pro management software SafePace® Cloud remote management 24/7 365 day unlimited programming and scheduling		

Feature	Specifications		
Power Options (Electrical Specifications)			
AC power input	100~240 V AC		
DC power input	12 V DC		
DC power options	12V, 18Ah Lead acid batteries.		
Solar panel option	50W solar panel		
	Radar		
Internal Radar:	Doppler (FCC approved)		
Model	DF 300		
Radar RF out	5 mW maximum		
Radar f-center	24.125 GHz +/- 25 MHz		
Pickup distance	Up to 1,200 feet		
Beam angle	24° (vertical) x 12° (horizontal)		
Beam polarization	Linear		
	Display		
LEDs	1590		
Digits (Amber)	768 LEDs: Color: Yellow (590 nm) Viewing angle at 50% IV: 30° Partial Flux (Brightness): 9000– 24000 Ev,[lux]/LED		
Digits (Red)	768 LEDs: Color: Red (633 nm) Viewing angle at 50% IV: 30° Partial Flux (Brightness): 7100– 18000 Ev,[lux]/LED		
Speed Violator Strobes	54 LEDs: Color: White (2700 k - 6500 k) Viewing angle at 50% IV: 150° Luminous Flux: typically 33lm @ 4000 K Luminous Efficacy: typically 176 lm/W @4000 K		
Ambient light sensor	1 sensor and automatic brightness adjustment		
	Enclosure		
Construction	Vandal resistant, lightweight polymer. Matte black front for reduced glare and maximum contrast. Light gray body to minimize heat absorption		
Weatherproof Rating	Weatherproof, NEMA 3, IP55 level compliant. Non-sealed and ventilated		
Warranty			
Sign	2 years		
Batteries	1 year		